


## AeraMax Pro AM3

### REMOVES OVER 99.99% OF COVID-19†


In a recent test, Fellowes AeraMax Pro AM3 & AM4 air purifiers demonstrated to eliminate COVID-19†, using a combination of smart and integrated technologies—only from Fellowes.

### SPECIFICATIONS

Weight of system (including filters)	20 lbs. (9.1kg)
Air flow, 5 speeds (CFM)	76, 93, 112, 140, 220
Sound pressure levels, each fan speed (dB)	38, 41, 48, 52, 67
Power requirements	120v, 60Hz, 2A
Power consumption (watts)	5, 8, 11, 21, 100
Electrical safety certification:	UL
Ozone testing certification:	UL2998: Report 1001231822-3923572
Motor	Single motor: encased brushless DC motor, thermal and overcurrent protection, designed for low noise, long-term continuous use at high RPM
Air intake / outlet	Bottom / Top
Control panel	Capacitive touch
Sensors	 EnviroSmart™
Housing material	UV stabilized ABS
Operating temperature / humidity level	41-104°F (5°C-40°C)
Area coverage	300 Square Feet (5 ACH) 550 Square Feet (3 ACH)
Warranty	5 Year Limited



### CONFIGURATIONS

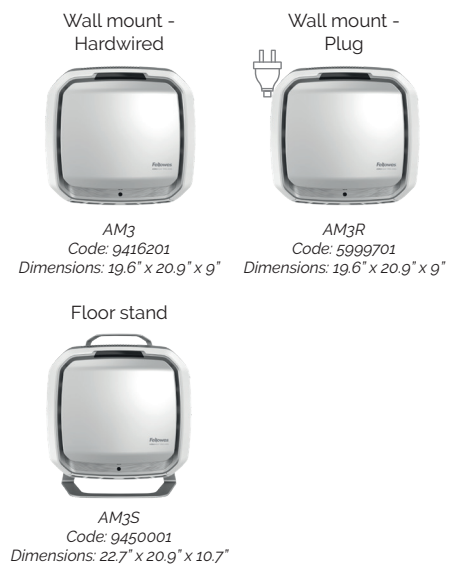

### AERAMAX PRO AM3 REPLACEMENT FILTERS



	Standard Filter Configuration	Hybrid Filter	Full Carbon Filter (High Odour/VOC)	Pre-Filters
<b>Filter Type</b>	3/8" Carbon Filter (w/pre-filter) 2" H13 True HEPA	2" filter containing 50% Carbon & 50% True HEPA	2" Carbon Filter (w/pre filter)	Replacement Pre-Filter
<b>Estimated Filter Life</b>	3/8" Carbon: 6 Months 2" H13 True HEPA: 12 Months	12 Months	12 Months	6-12 Months
<b>Pack Size</b>	3/8" Carbon: 4 Pack 2" H13 True HEPA: 2 Pack	2 Pack (ships with pre-filters)	2 Pack	4 Pack
<b>Item Numbers</b>	3/8" Carbon: 9416502 2" H13 True HEPA: 9416602	9436902	9436802	9600501

†Fellowes AeraMax Pro AM3 & AM4 air purifiers demonstrated, through independent laboratory testing, to be effective in eliminating aerosolized concentration of SARS-CoV-2 by 99.9999% through a single air pass test of the purifier. In addition, AeraMax Pro air purifiers reached 99.99% airborne reduction of a surrogate Human Coronavirus 229E in a 20m3 test chamber within 1 hour of operation in a separate test.